



PITCH 0.5mm FPC CONNECTOR SMT TYPE

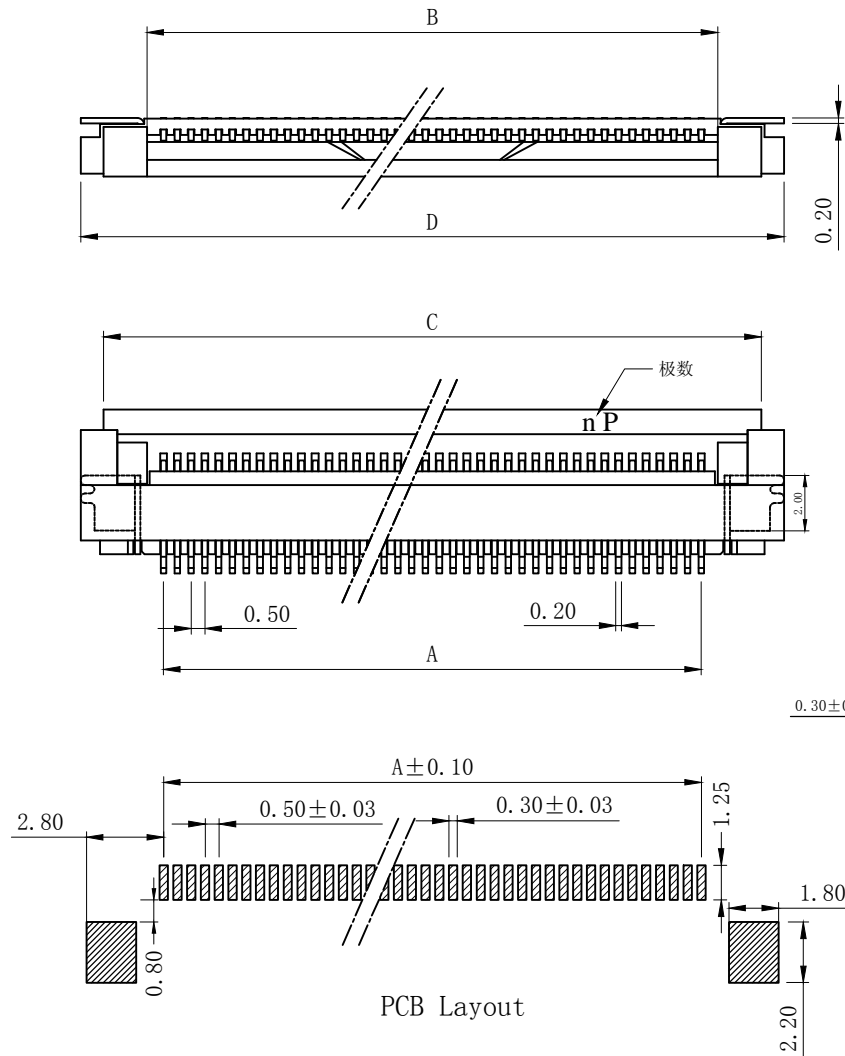

PCB Layout



性能:

额定电流: 0.4A

额定电压: 50V

耐电压: 200V

接触电阻: ≤20mΩ

绝缘电阻: 500MΩ

工作温度: -20℃~+85℃

塑件(材质): LCP, UL94V-0

锁扣(材质): 锁扣材质为LCP

插簧(材质): 磷青铜, 镀锡/镀金

焊片(材质): 黄铜, 镀锡/镀金

适用扁平电缆

一沃电子实业有限公司
TEL:+86-755-36887540
FAX:+86-755-36887541
<http://www.ewconn.com>

X. ± 0.3	X.° ± 5°	UNITS mm	NAME (INTENDED USE)	<div>EWCONNECTOR</div> E-WORLD Electronic Industry Ltd				
.X ± 0.25	.X° ± 2°			PART NO. (INTENDED USE) EW521D-XXP	TITLE: FPC0.5-FLIP-LOCK CONNECTOR			
.XX ± 0.20	.XX° ± 1°	FINISH	APPD:		DWG NO.: 050K12-CUB0000000			
.XXX ± 0.10	.XXX° ± 0.5°		Q' TY	CHKD:			SCALE	SHEET
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		DR: YLZ 2011.09.28		1/1			1/1	A