

12

11

10

9

8

7

6

5


4

3

2

1




REV.	ECO NO.	DATE	SIGN	DESCRIPTION
A		2009/03/16		RELEASED



1. Material
- 1.1: Housing: LCP UL94-V0 Color:Nature.
- 1.2: Contact: C5191-H T=0.20±0.01.
- 1.3: LFG: C2680-H T=0.25±0.01.


2. Plating
- 2.1: Contact: Gold Flash over Nickel.
- 2.2: LFG: Gold Flash over Nickel.

3. Rating:
- 3.1: Operating Voltage: 30V AC/DC.
- 3.2: Current Rating: 0.2A AC/DC.
- 3.3: Operating Temperature:-55° C~+85° C.

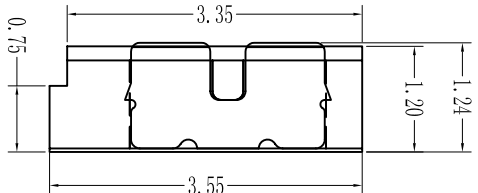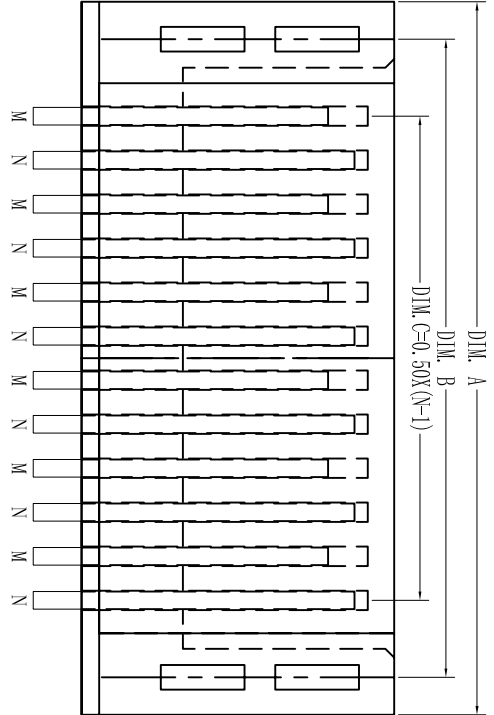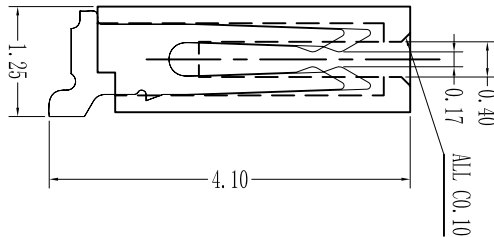


注意: M为短端, N为长端.

深圳乙沃鑫科有限公司
TEL:+86135-901-78542
FAX:+86-755-32932856
www.ewconn.com




Recommend P.C.B Layout

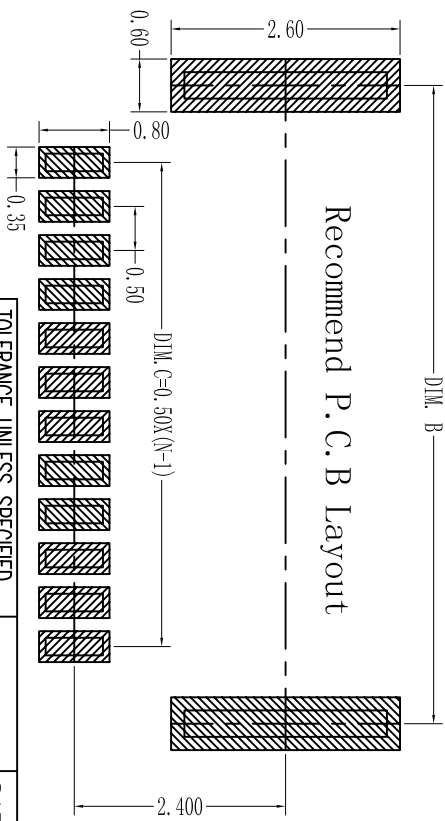

4. PART NO:
EW511-XX R-TU G
PFC Conn
PITCH: 0.5
SERIE NUMBER
RIGHT ANGLE(DOUBLE-FACE CONTACT)
PLATING:GF
PACKAGING TA-EMBOSSED TAPE
TU-TUBE

PORT NO	A	B	PORT NO	A	B
04P	4.10	3.25	25P	14.60	13.75
05P	4.60	3.75	26P	15.10	14.25
06P	5.10	4.25	27P	15.60	14.75
07P	5.60	4.75	28P	16.10	15.25
08P	6.10	5.25	29P	16.60	15.75
09P	6.60	5.75	30P	17.10	16.25
10P	7.10	6.25	31P	17.60	16.75
11P	7.60	6.75	32P	18.10	17.25
12P	8.10	7.25	33P	18.60	17.75
13P	8.60	7.75	34P	19.10	18.25
14P	9.10	8.25	35P	19.60	18.75
15P	9.60	8.75	36P	20.10	19.25
16P	10.10	9.25	37P	20.60	19.75
17P	10.60	9.75	38P	21.10	20.25
18P	11.10	10.25	39P	21.60	20.75
19P	11.60	10.75	40P	22.10	21.25
20P	12.10	11.25	41P	22.60	21.75
21P	12.60	11.75	42P	23.10	22.25
22P	13.10	12.25	43P	23.60	22.75
23P	13.60	12.75	44P	24.10	23.25
24P	14.10	13.25	45P	24.60	23.75

TOLERANCE UNLESS SPECIFIED		DATE 08.10.08	DAR. BY	MATERIAL	
LINEAR	ANGLE				
X ±0.05	X° XX	SCALE 1/1	CHK. BY	FINISH	
XX ±0.01	X° XX			PART NO.	
XXX ±0.01	XX° XX	UNIT mm	APP. BY		



TITLE: FPC0.5 H1.2 NON-ZIF Connector
DWG NO. EW511 www.ewconn.com

EWCONNECTOR 深圳乙沃鑫科有限公司

REV. A
C