
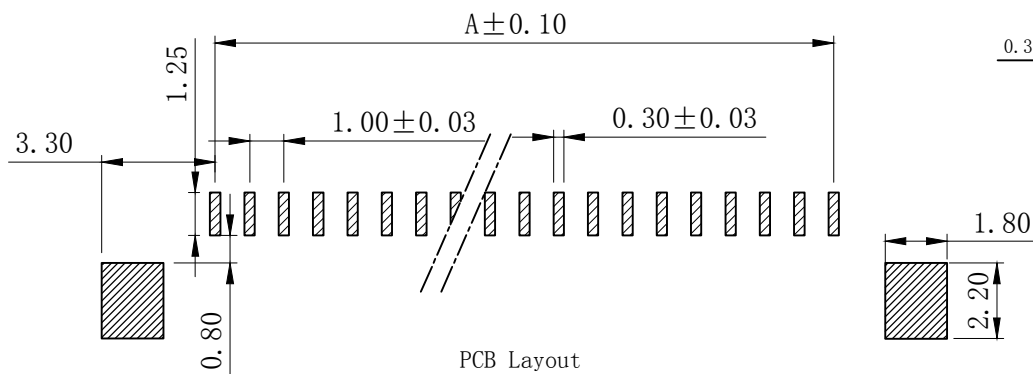
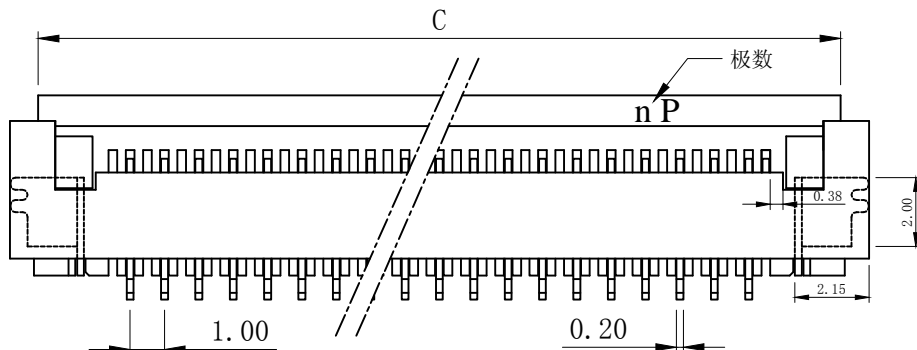


PITCH 1.00mm FPC CONNECTOR SMT TYPE

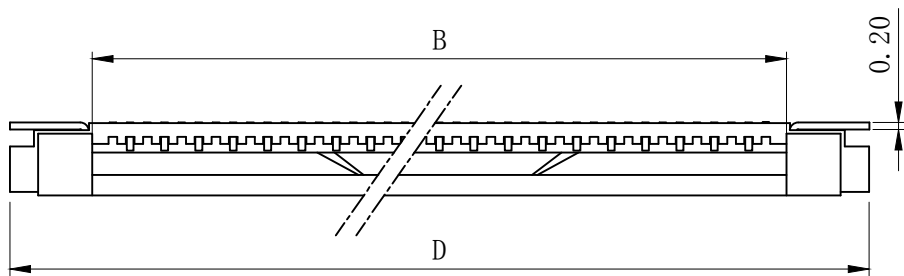

PCB Layout

性能:

额定电流: 0.4A
额定电压: 50V
耐电压: 200V
接触电阻: $\leq 20\text{m}\Omega$
绝缘电阻: 500M Ω
工作温度: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$

塑件(材质): LCP, UL94V-0
锁扣(材质): 锁扣材质为LCP
插簧(材质): 磷青铜, 镀锡/镀金
焊片(材质): 黄铜, 镀锡/镀金

注:



"▲"处尺寸为

4Pin~29Pin: 1.50mm;
30Pin~39Pin: 1.60mm;
40Pin~60Pin: 1.70mm;

注:

"■"处尺寸为

4Pin~29Pin: 4.70mm;
30Pin~39Pin: 4.80mm;
40Pin~60Pin: 4.90mm;

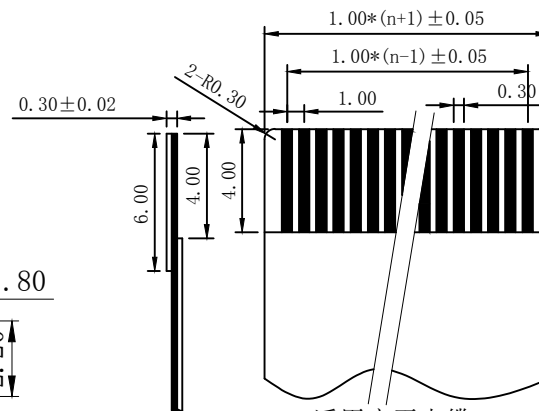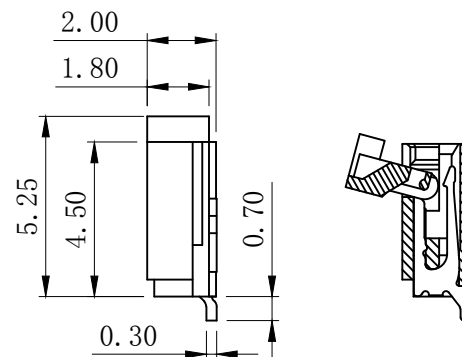

适用扁平电缆

孔位	A	B	C	D
4	3.00	5.20	8.50	9.90
5	4.00	6.20	9.50	10.90
6	5.00	7.20	10.50	11.90
7	6.00	8.20	11.50	12.90
8	7.00	9.20	12.50	13.90
9	8.00	10.20	13.50	14.90
10	9.00	11.20	14.50	15.90
11	10.00	12.20	15.50	16.90
12	11.00	13.20	16.50	17.90
13	12.00	14.20	17.50	18.90
14	13.00	15.20	18.50	19.90
15	14.00	16.20	19.50	20.90
16	15.00	17.20	20.50	21.90
17	16.00	18.20	21.50	22.90
18	17.00	19.20	22.50	23.90
19	18.00	20.20	23.50	24.90
20	19.00	21.20	24.50	25.90
21	20.00	22.20	25.50	26.90
22	21.00	23.20	26.50	27.90
23	22.00	24.20	27.50	28.90
24	23.00	25.20	28.50	29.90
25	24.00	26.20	29.50	30.90
26	25.00	27.20	30.50	31.90
27	26.00	28.20	31.50	32.90
28	27.00	29.20	32.50	33.90
29	28.00	30.20	33.50	34.90
30	29.00	31.20	34.50	35.90
31	30.00	32.20	35.50	36.90
32	31.00	33.20	36.50	37.90
33	32.00	34.20	37.50	38.90
34	33.00	35.20	38.50	39.90
35	34.00	36.20	39.50	40.90

一沃电子实业有限公司
TEL:+86-755-36887540
FAX:+86-755-36887541
<http://www.ewconn.com>

X. ± 0.3	X.° $\pm 5^{\circ}$	UNITS mm
.X ± 0.25	.X° $\pm 2^{\circ}$	MAT'L
.XX ± 0.20	.XX° $\pm 1^{\circ}$	
.XXX ± 0.10	.XXX° $\pm 0.5^{\circ}$	FINISH
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		Q' TY

NAME (INTENDED USE)	EWCONNECTOR		
	E-World Electronic Industry Ltd		
PART NO. (INTENDED USE)	TITLE:		
1. OK-DX-nPWB	EW1021D-XXP		
APPD:	DWG NO.:		
CHKD:	100K11-DXB0000000		
DR: YLZ 2011.09.28			
		SCALE	SHEET
		1/1	1/1
		REV.	A