
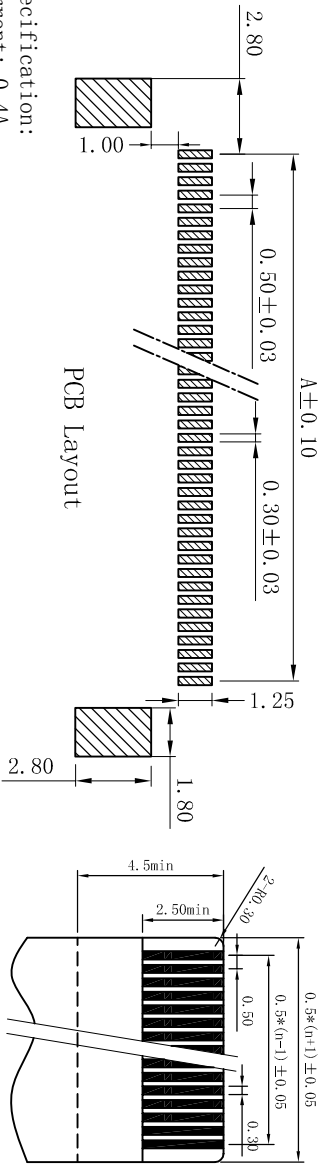
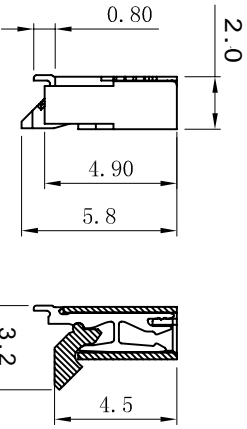
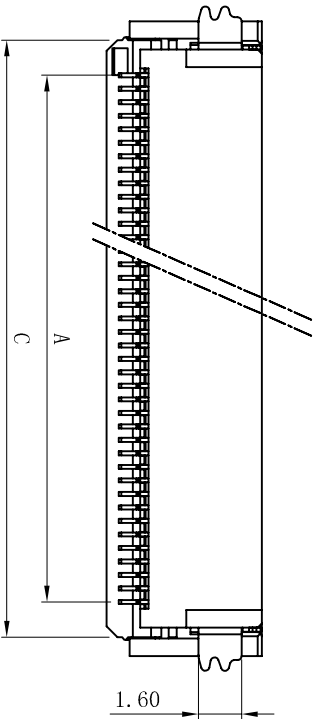



PITCH 0.5mm FPC CONNECTOR SMT TYPE

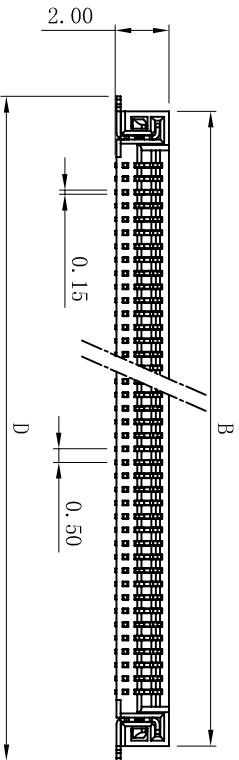

specification:
Current: 0.4A
Voltage: 50V
Withstand voltage:200V
Contact resistance:≤20mΩ
Insulation resistance:500V/Ω
Temperature: -20℃~+85℃
Plastic: LCP, UL94V-0
Lock catch:LCP
Shell splinter:Phosphor bronze gold plating

深圳亿沃鑫科有限公司
TEL:+86135-901-78542
FAX:+86-755-32932856
www.ewconn.com

孔位	A	B	C	D
10	4.50	8.50	7.10	9
12	5.50	9.50	8.10	10
14	6.50	10.50	9.10	11
18	8.50	12.50	11.10	13
20	9.50	13.50	12.10	14
22	10.50	14.50	13.10	15
24	11.50	15.50	14.10	16
26	12.50	16.50	15.10	17
30	14.50	18.50	17.10	19
32	15.50	19.50	18.10	20
33	16.00	20.00	18.60	20.5
34	16.50	20.50	19.10	21
35	17.00	21.00	19.60	21.5
36	17.50	21.50	20.10	22
38	18.50	22.50	21.10	23
40	19.50	23.50	22.10	24
42	20.50	24.50	23.10	25
45	22.00	26.00	24.60	26.5
50	24.50	28.50	27.10	29
55	27.00	31.00	29.60	31.5
60	29.50	33.50	32.10	34

X. ± 0.3		X.° ± 5°	UNITS mm	NAME (INTENDED USE)		EWCONNECTOR			
.X ± 0.25		.X° ± 2°		MATERIAL	PART NO. (INTENDED USE)		深圳亿沃鑫科有限公司		
.XX ± 0.20		.XX° ± 1°			EW529		PH0.5-H2.0-BACK LOCK		
.XXX ± 0.10		.XXX° ± 0.5°			FINISH				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY			Q'TY	CHGD:					
			DR:	VLZ 2012.05.10					
						SCALE 1/1			
						SHEET 1/1			
						REV. A			