
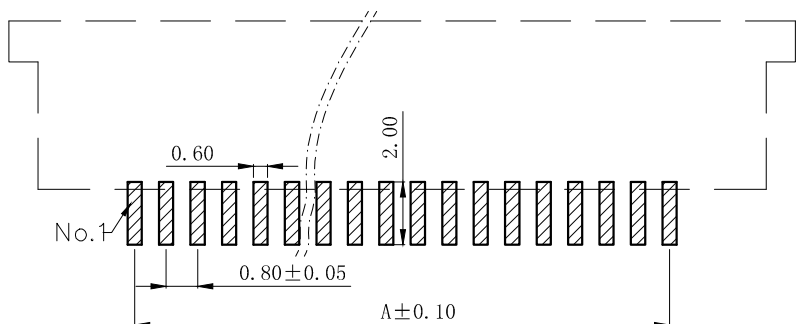
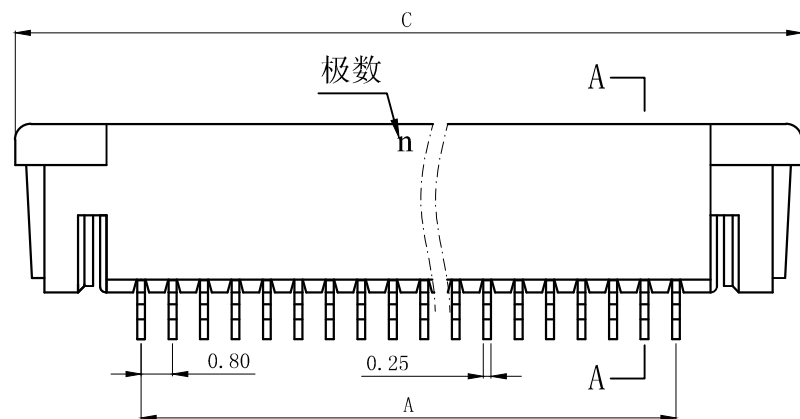


一沃电子实业有限公司
TEL:+86-755-36887540
FAX:+86-755-36887541
http://www.ewconn.com

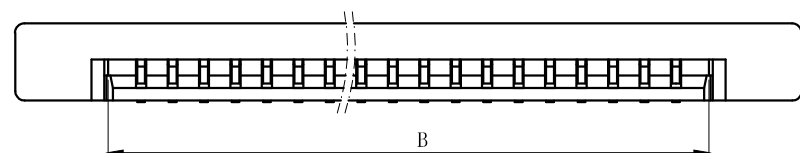




性能: 印制电路板(PCB)

额定电流: 0.4A
额定电压: 50V
耐电压: 200V
接触电阻: $\leq 20\text{m}\Omega$
绝缘电阻: $500\text{M}\Omega$
工作温度: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$

注:
"▲"处尺寸为
4Pin~29Pin: 1.50mm;
30Pin~39Pin: 1.60mm;
40Pin~60Pin: 1.70mm;


注:
"■"处尺寸为
4Pin~29Pin: 4.70mm;
30Pin~39Pin: 4.80mm;
40Pin~60Pin: 4.90mm;




注: 当PIN数为30PIN或以下时, 锁扣材质为PA46.
当PIN数为30PIN以上时, 锁扣材质为LCP

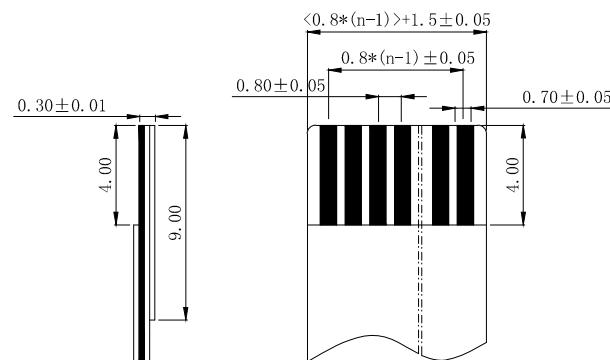

适用电缆

孔位	A	B	C
4	2.4	4	10.3
5	3.2	4.8	11.1
6	4	5.6	11.9
7	4.8	6.4	12.7
8	5.6	7.2	13.5
9	6.4	8	14.3
10	7.2	8.8	15.1
11	8	9.6	15.9
12	8.8	10.4	16.7
13	9.6	11.2	17.5
14	10.4	12	18.3
15	11.2	12.8	19.1
16	12	13.6	19.9
17	12.8	14.4	20.7
18	13.6	15.2	21.5
19	14.4	16	22.3
20	15.2	16.8	23.1
21	16	17.6	23.9
22	16.8	18.4	24.7
23	17.6	19.2	25.5
24	18.4	20	26.3
25	19.2	20.8	27.1
26	20	21.6	27.9
27	20.8	22.4	28.7
28	21.6	23.2	29.5
29	22.4	24	30.3
30	23.2	24.8	31.1
31	24	25.6	31.9
32	24.8	26.4	32.7
33	25.6	27.2	33.5
34	26.4	28	34.3
35	27.2	28.8	35.1

X. ± 0.3	X.° ± 5°	UNITS mm	NAME (INTENDED USE)	<div>EWCONNECTOR</div> <div>E-World Electronic Industry Ltd</div>			
.X ± 0.25	.X.° ± 2°		MAT'L	PART NO. (INTENDED USE)	TITLE:		
.XX ± 0.20	.XX.° ± 1°	FINISH	EW826	FPC0.8 SMT SLID DOWN-CONTACT SMT CONN			
.XXX ± 0.10	.XXX.° ± 0.5°			APPD:	DWG NO. :		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		Q'TY	CHKD:	<div></div>			
			DR:				
							1/1

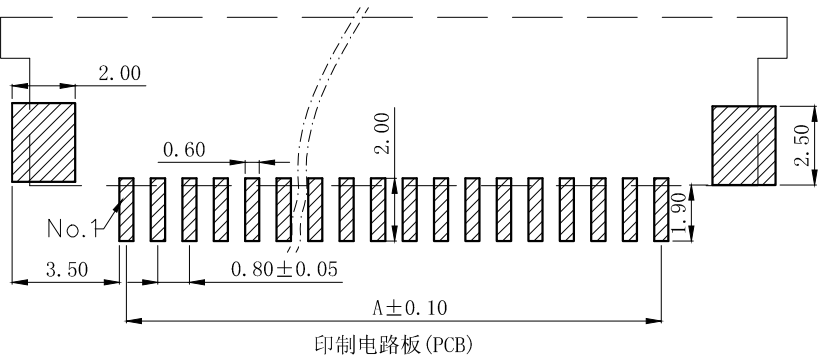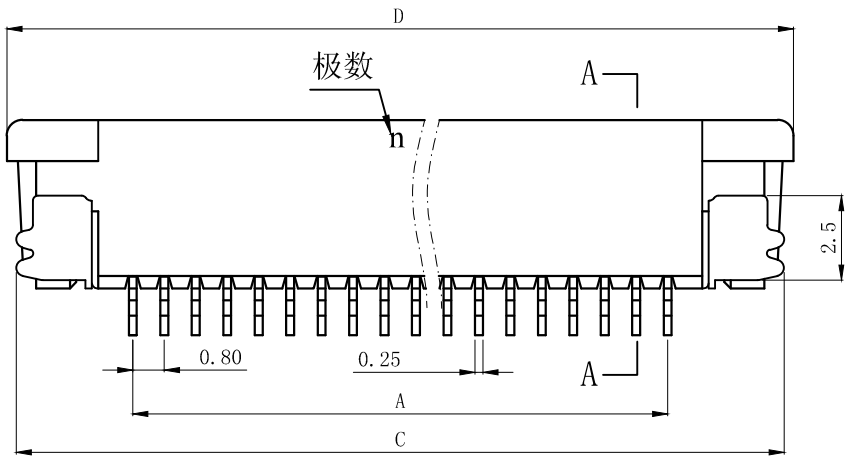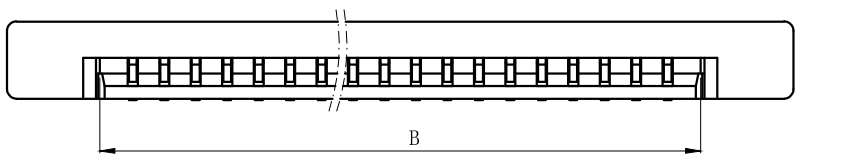





性能:
额定电流: 0.4A
额定电压: 50V
耐电压: 200V
接触电阻: $\leq 20\text{m}\Omega$
绝缘电阻: $500\text{M}\Omega$
工作温度: $-20^{\circ}\text{C}\sim+85^{\circ}\text{C}$

塑件 (材质): LCP, UL94V-0
锁扣 (材质): 见下面备注
插簧 (材质): 磷青铜, 镀锡/镀金
焊片 (材质): 磷青铜, 镀锡/镀金

注:
“▲”处尺寸为
4Pin~29Pin: 1.50mm;
30Pin~39Pin: 1.60mm;
40Pin~60Pin: 1.70mm;

注:
“■”处尺寸为
4Pin~29Pin: 4.70mm;
30Pin~39Pin: 4.80mm;
40Pin~60Pin: 4.90mm;

注: 当PIN数为30PIN或以下时, 锁扣材质为PA46.
当PIN数为30PIN以上时, 锁扣材质为LCP

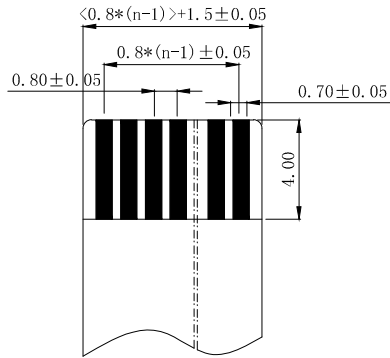

孔位	A	B	C	D
4	2.4	4	9.6	10.3
5	3.2	4.8	10.4	11.1
6	4	5.6	11.2	11.9
7	4.8	6.4	12	12.7
8	5.6	7.2	12.8	13.5
9	6.4	8	13.6	14.3
10	7.2	8.8	14.4	15.1
11	8	9.6	15.2	15.9
12	8.8	10.4	16	16.7
13	9.6	11.2	16.8	17.5
14	10.4	12	17.6	18.3
15	11.2	12.8	18.4	19.1
16	12	13.6	19.2	19.9
17	12.8	14.4	20	20.7
18	13.6	15.2	20.8	21.5
19	14.4	16	21.6	22.3
20	15.2	16.8	22.4	23.1
21	16	17.6	23.2	23.9
22	16.8	18.4	24	24.7
23	17.6	19.2	24.8	25.5
24	18.4	20	25.6	26.3
25	19.2	20.8	26.4	27.1
26	20	21.6	27.2	27.9
27	20.8	22.4	28	28.7
28	21.6	23.2	28.8	29.5
29	22.4	24	29.6	30.3
30	23.2	24.8	30.4	31.1
31	24	25.6	31.2	31.9
32	24.8	26.4	32	32.7
33	25.6	27.2	32.8	33.5
34	26.4	28	33.6	34.3
35	27.2	28.8	34.4	35.1

X. ± 0.3	X.° ± 5°	UNITS mm	NAME (INTENDED USE)	EWCONNECTOR				
.X ± 0.25	.X° ± 2°		PART NO. (INTENDED USE) EW826	E-World Electronic Industry Ltd				
.XX ± 0.20	.XX° ± 1°	FINISH		APPD:	FPC0.8 SMT SLID DOWN-CONTACT SMT CONN			
.XXX ± 0.10	.XXX° ± 0.5°		DWG NO.:					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY			Q' TY	CHKD:		SCALE	SHEET	REV.
			DR:			1/1	1/1	A