

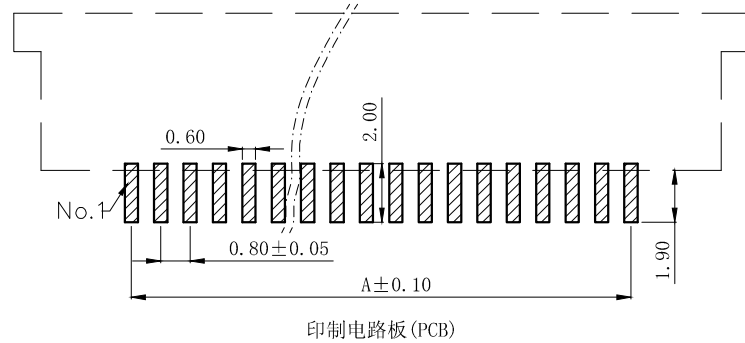
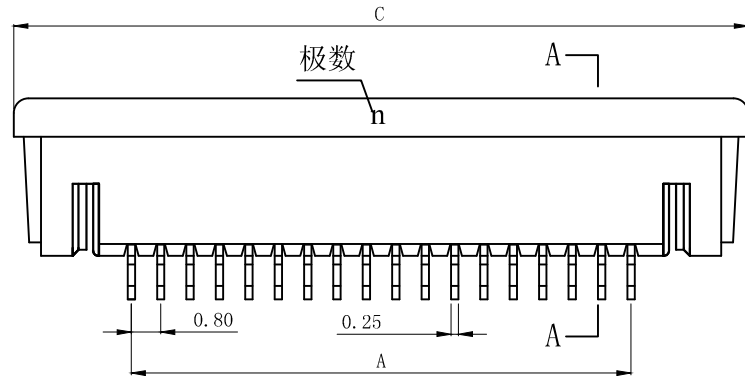
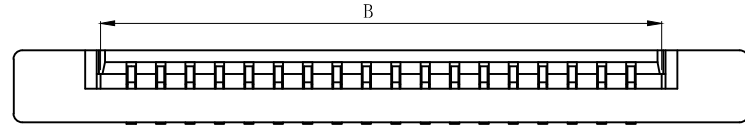




一沃电子实业有限公司
TEL:+86-755-36887540
FAX:+86-755-36887541
http://www.ewconn.com



印制电路板 (PCB)



A--A

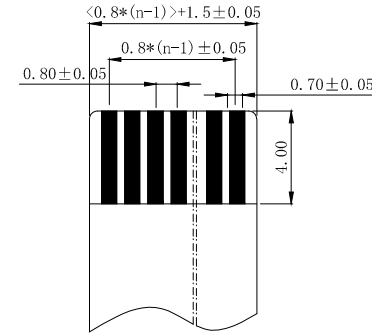

适用电缆

孔位	A	B	C
4	2.4	4	10.3
5	3.2	4.8	11.1
6	4	5.6	11.9
7	4.8	6.4	12.7
8	5.6	7.2	13.5
9	6.4	8	14.3
10	7.2	8.8	15.1
11	8	9.6	15.9
12	8.8	10.4	16.7
13	9.6	11.2	17.5
14	10.4	12	18.3
15	11.2	12.8	19.1
16	12	13.6	19.9
17	12.8	14.4	20.7
18	13.6	15.2	21.5
19	14.4	16	22.3
20	15.2	16.8	23.1
21	16	17.6	23.9
22	16.8	18.4	24.7
23	17.6	19.2	25.5
24	18.4	20	26.3
25	19.2	20.8	27.1
26	20	21.6	27.9
27	20.8	22.4	28.7
28	21.6	23.2	29.5
29	22.4	24	30.3
30	23.2	24.8	31.1
31	24	25.6	31.9
32	24.8	26.4	32.7
33	25.6	27.2	33.5
34	26.4	28	34.3
35	27.2	28.8	35.1

性能:

额定电流: 0.4A
额定电压: 50V
耐电压: 200V
接触电阻: $\leq 20m\Omega$
绝缘电阻: $500M\Omega$
工作温度: $-20^{\circ}C \sim +85^{\circ}C$

塑件 (材质): LCP, UL94V-0
锁扣 (材质): 见下面备注
插簧 (材质): 磷青铜, 镀锡/镀金


注:

▲"处尺寸为
4Pin~29Pin: 1.50mm;
30Pin~39Pin: 1.60mm;
40Pin~60Pin: 1.70mm;




注:

■"处尺寸为
4Pin~29Pin: 4.70mm;
30Pin~39Pin: 4.80mm;
40Pin~60Pin: 4.90mm;





注: 当PIN数为30PIN或以下时, 锁扣材质为PA46.
当PIN数为30PIN以上时, 锁扣材质为LCP

X. ± 0.3	X.° ± 5°	UNITS mm	NAME (INTENDED USE)	EWCONNECTOR			
.X ± 0.25	.X° ± 2°	MAT' L	PART NO. (INTENDED USE) EW827	E-World Electronic Industry Ltd			
.XX ± 0.20	.XX° ± 1°	FINISH		TITLE: FPC0.8 Slid ZIF UP-CONTACT SMT CONN			
.XXX ± 0.10	.XXX° ± 0.5°		APPD:	DWG NO. :			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY			Q' TY	CHKD:			
			DR:				
						SCALE	SHEET
				1/1	1/1	A	

PITCH 0.8mm FPC CONNECTOR SMT TYPE

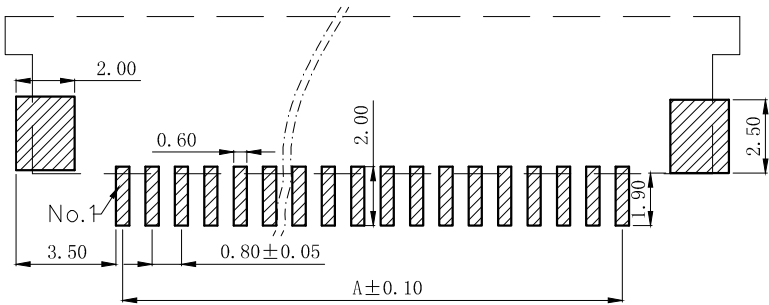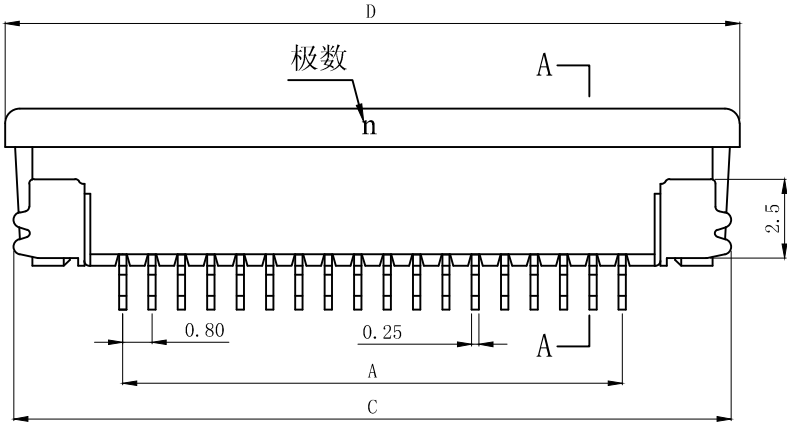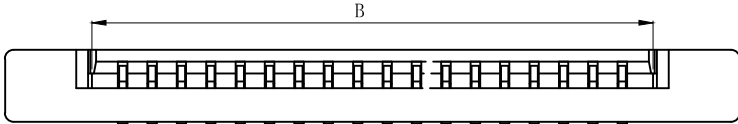

印制电路板 (PCB)



适用电缆

孔位	A	B	C	D
4	2.4	4	9.6	10.3
5	3.2	4.8	10.4	11.1
6	4	5.6	11.2	11.9
7	4.8	6.4	12	12.7
8	5.6	7.2	12.8	13.5
9	6.4	8	13.6	14.3
10	7.2	8.8	14.4	15.1
11	8	9.6	15.2	15.9
12	8.8	10.4	16	16.7
13	9.6	11.2	16.8	17.5
14	10.4	12	17.6	18.3
15	11.2	12.8	18.4	19.1
16	12	13.6	19.2	19.9
17	12.8	14.4	20	20.7
18	13.6	15.2	20.8	21.5
19	14.4	16	21.6	22.3
20	15.2	16.8	22.4	23.1
21	16	17.6	23.2	23.9
22	16.8	18.4	24	24.7
23	17.6	19.2	24.8	25.5
24	18.4	20	25.6	26.3
25	19.2	20.8	26.4	27.1
26	20	21.6	27.2	27.9
27	20.8	22.4	28	28.7
28	21.6	23.2	28.8	29.5
29	22.4	24	29.6	30.3
30	23.2	24.8	30.4	31.1
31	24	25.6	31.2	31.9
32	24.8	26.4	32	32.7
33	25.6	27.2	32.8	33.5
34	26.4	28	33.6	34.3
35	27.2	28.8	34.4	35.1

性能:

额定电流: 0.4A
额定电压: 50V
耐电压: 200V
接触电阻: $\leq 20m\Omega$
绝缘电阻: $500M\Omega$
工作温度: $-20^{\circ}C \sim +85^{\circ}C$

注:

▲"处尺寸为
4Pin~29Pin: 1.50mm;
30Pin~39Pin: 1.60mm;
40Pin~60Pin: 1.70mm;

注:

■"处尺寸为
4Pin~29Pin: 4.70mm;
30Pin~39Pin: 4.80mm;
40Pin~60Pin: 4.90mm;

注: 当PIN数为30PIN或以下时, 锁扣材质为PA46.
当PIN数为30PIN以上时, 锁扣材质为LCP

塑件 (材质): LCP, UL94V-0
锁扣 (材质): 见下面备注
插簧 (材质): 磷青铜, 镀锡/镀金
焊片 (材质): 磷青铜, 镀锡/镀金

X. ± 0.3	X.° ± 5°	UNITS mm	NAME (INTENDED USE)	<div>EWCONNECTOR</div>			
.X ± 0.25	.X° ± 2°	MAT' L	PART NO. (INTENDED USE)	E-World Electronic Industry Ltd			
.XX ± 0.20	.XX° ± 1°		EW827	TITLE: FPC0.8 Slid ZIF UP-CONTACT SMT CONN			
.XXX ± 0.10	.XXX° ± 0.5°	FINISH	APPD:	DWG NO. :			
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY		Q' TY	CHKD:	<div><div><div></div><div></div></div><div></div></div> <div>SCALE</div> <div>SHEET</div> <div>REV.</div>			
			DR: YLZ 2011.09.28				
							1/1